


ALH-0.66 M Current Transformer Siemens APT

Product Features

ALH-0.66M type current transformer is applicable to small current and small space occasions, especially the drawer cabinet. It can be easily and directly installed with the guide rail (or the bottom rail provided by the manufacturer) or the bus. By adopting the screw-type primary wiring, it may not need to increase the number of coils on the primary side during small current.

Apart from the features of M type, ALH-0.66M \emptyset type current transformer's primary side uses the direct core-through methods, without disconnecting the wire. The core-through hole diameters are $\emptyset 8\text{mm}$, $\emptyset 12\text{mm}$, $\emptyset 15\text{mm}$ and $\emptyset 22\text{mm}$ with one coil each (except for the customized specification not included in the sample).

Model

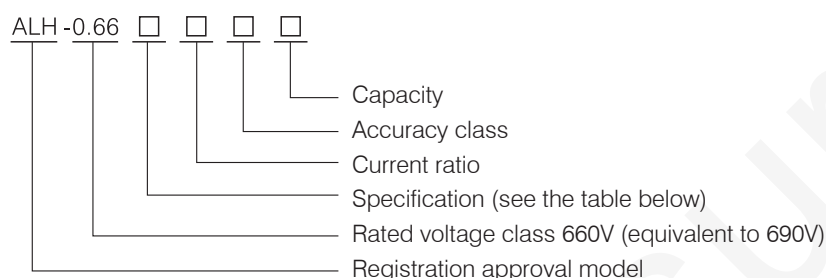

M8-I



M8-II



Ø8-I Ø15-I



Ø8-II Ø15-II




Ø12 Ø22


Specifications and dimensions

Dimensions Specifications and models	External size			Perforati on size	Installation size	Installation methods (page 9)
	W	H	D	Ø	M	
M8-I	74	101	44	/	65 35	F.G.I
Ø8-I	74	101	44	8	65 35	F.G
Ø15-I	74	101	44	15	65 35	F.G
M8-II	67	86	24	/	70	H.I
Ø12	67	86	24	12	70	H
Ø22	67	86	24	22	70	H
Ø8-II	59	82	26	8	70	/
Ø15-II	59	82	26	15	70	/

Note: "/" refers to the installation method not available.



M8-I Ø8-I Ø15-I

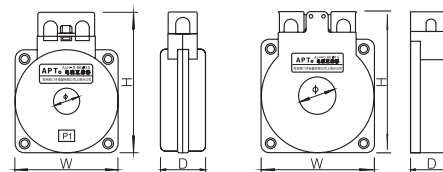

Ø8-II Ø15-II

M8-II Ø12 Ø22

Technical Data

- Primary current 5-800A secondary current 5A, 1A
- Rated voltage AC 660V
- Rated frequency 50-60Hz
- Ambient temperature -30°C - +70°C Maximum temperature resistance 120°C
- Altitude $\leq 3000\text{m}$
- Power frequency withstand voltage 3000V 1min 50Hz (between the enclosure and the secondary coil)
- Insulation class E

Technical Data Table

Specifications and models	M8-I		M8-II		Ø8-I	Ø8-II	Ø12		Ø15-I	Ø15-II	Ø22	
Accuracy class	0.5	1	0.5	1	1	1	0.5	1	1	1	0.5	1
Rated current ratio	Rated capacity (VA)											
5/5		2.5		2.5								
10/5		2.5		2.5								
15/5		2.5		2.5								
20/5		2.5		2.5								
25/5		2.5		2.5								
30/5		2.5		2.5								
40/5		2.5		2.5								
50/5		2.5		2.5								
60/5		2.5		2.5								
75/5		2.5		2.5	2.5	2.5		2.5	2.5	2.5		2.5
100/5		2.5		2.5	2.5	2.5		2.5	2.5	2.5		2.5
150/5	2.5		2.5		2.5	2.5	2.5	2.5	2.5	2.5		2.5
200/5					5	5	2.5	5	5	5		5
250/5					5	5	2.5	5	5	5		5
300/5					5	5	2.5	5	5			5
400/5							2.5	5	5			5
500/5							5		10			10
600/5									10			10
750/5												10
800/5												10
5/1	0.4		0.4									
10/1	0.4		0.4									
15/1	0.4		0.4									
20/1	0.4		0.4		0.1	0.1		0.1	0.1	0.1		0.1
25/1	0.4		0.4		0.1	0.1		0.1	0.1	0.1		0.1
30/1	0.4		0.4		0.1	0.1	0.1		0.1	0.1	0.1	
40/1	0.4		0.4		0.1	0.1	0.1		0.1	0.1	0.1	
50/1	0.4		0.4		0.2	0.2	0.2		0.2	0.2	0.2	
60/1	0.4		0.4		0.2	0.2	0.2		0.2	0.2	0.2	
75/1	0.4		0.4		0.2	0.2	0.2		0.2	0.2	0.2	
100/1	0.4		0.4		0.2	0.2	0.2		0.2	0.2	0.2	
150/1					2.5	2.5	2.5		2.5	2.5	2.5	
200/1					5	5	5		5	5	5	
250/1							5		5		5	
300/1							5		5		5	
400/1							10		10		10	
500/1												
600/1												

Note: The blanks without capacity can be realized by core-through or model not available.

ALH-0.66 Series Current Transformer

How to install?



Fig. A Bent sheet short bar fixation



Fig. B Straight sheet long bar fixation




Fig. C Single sheet platen fixation (straight sheet)




Fig. D Single sheet platen fixation (bent sheet)



Fig. E Double sheet platen fixation




Fig. F Guide rail fixation



Fig. G Matched bottom rail fixation




Fig. H Dead plate fixation



Fig. I Bus fixation




Fig. J Busbar fixation

Installation Caution

1. The secondary winding of current transformer cannot be open circuit, otherwise, the high voltage may endanger the equipment and personal safety.
2. One end of the secondary side of current transformer shall be reliable grounding to avoid insulation breakdown between the primary and the secondary.
3. The current transformer shall be used strictly based on the rated power, the rated transformation ratio and the accuracy class on the nameplate.
4. The primary winding of current transformer and the tested circuit shall be in series, the secondary winding and the electrical measuring instrument shall be in series, and the polarity of current transformer shall be noted during wiring.
5. The connecting lead for secondary loop shall adopt the insulated wire with small resistance, without any connectors in the center.
6. The impedance of instrument connected in series with the secondary winding loop shall not exceed that specified in the technical standards.
7. The same current transformer shall not be used for relay protection and electricity measurement.

Order instruction

1. The current transformer's model, specification, current ratio, accuracy class and the secondary rated capacity shall be specified;
2. Specify the installation methods. (If not specified, the company can provide as per its regulations.)
3. It can be customized for special specifications.

Application project cases

National large public buildings

Shanghai New International Expo Center
Shanghai maglev train line
China Millennium Monument in Beijing
Oriental Pearl TV Station
Shanghai Stadium
Sichuan 703 TV Tower

School, hospital and office building

Shanghai Maritime University
Shanghai International Studies University
National Radio and Television Building
New Office Building for the Ministry of Foreign Affairs
Shanghai Ruijin Hospital
Shanghai Sixth People's Hospital

Power plant, power station and electric utility

Huaneng Yuhuan Power Plant (4×1000MW)
Shazhou Power Plant (2×600MW)
Guodian Changzhou Power Plant (2×600MW)
Fujian Ningde Power Plant (2×600MW)
Jiangsu Tianwan Nuclear Power Station
Daya Bay Nuclear Power Plant
Sichuan Ertan Power Plant

Airport, port and metro

Capital International Airport
Shenyang Taoxian International Airport
Shanghai Pudong International Airport
Ningbo Bukchang port
Nanjing Metro Lines 1 and 2
Shanghai Pearl Line (light rail) Phases 1 and 2
Shenzhen Metro Line 1

Petroleum, metallurgy and chemistry

Shanghai Baoshan Iron and Steel Plant
Shanghai Jinshan Petrochemical
Wuhan Iron and Steel Plant
Relocation Project of Shougang Group
Reconstruction Project of Sichuan Dagang

Others

Xinjiang Shihezi Project
Shandong Heavy Machinery Plant
Shanghai Zhenhua Port Machinery Co., Ltd.
Workshop for Shanghai Lili Industrial
Workshop for Guangzhou Perlos/Liteonmobile

