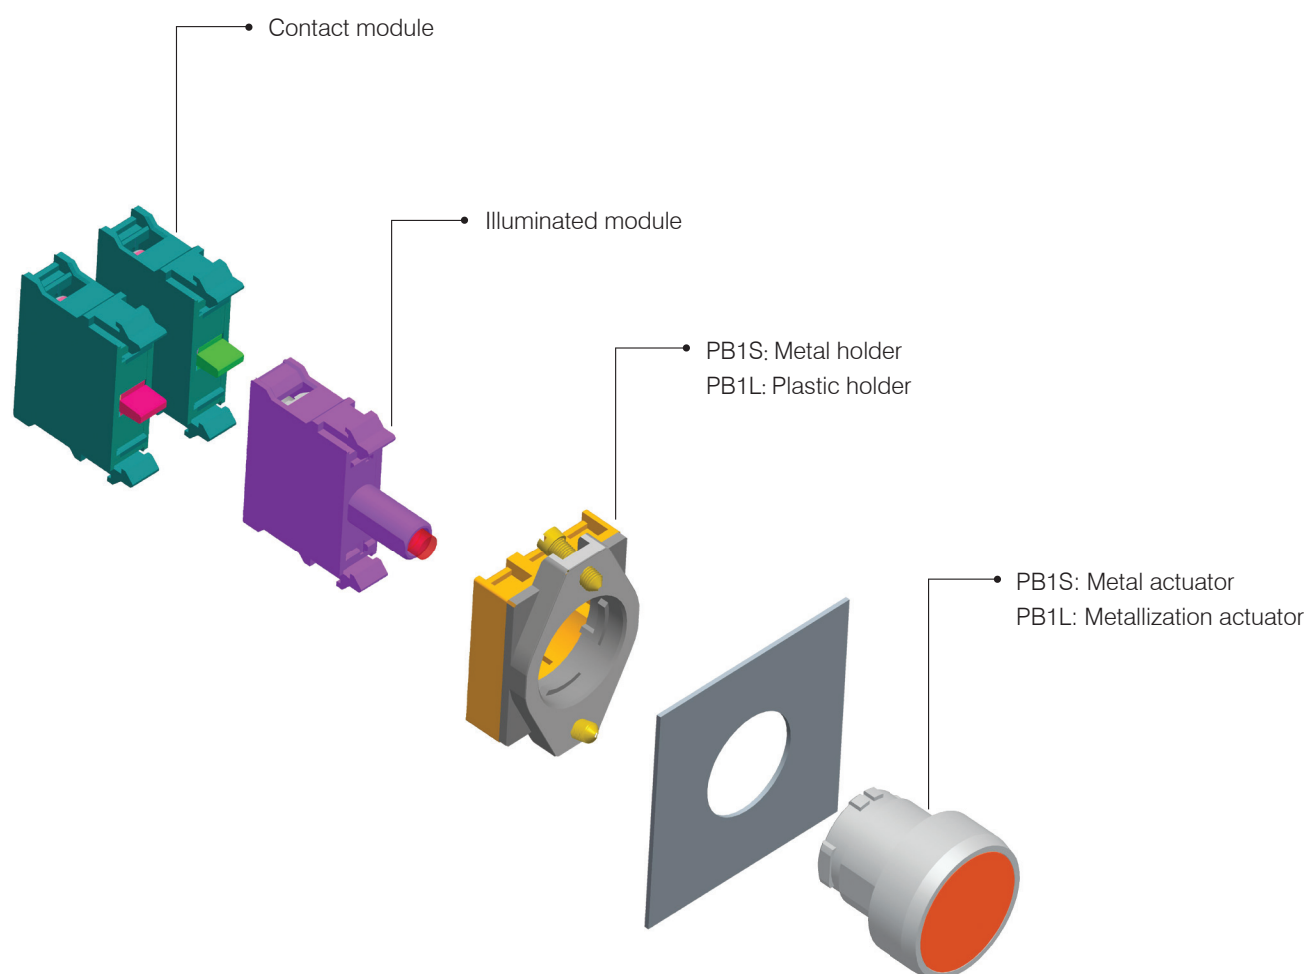


PB1L Emergency Switch 22mm Siemens APT

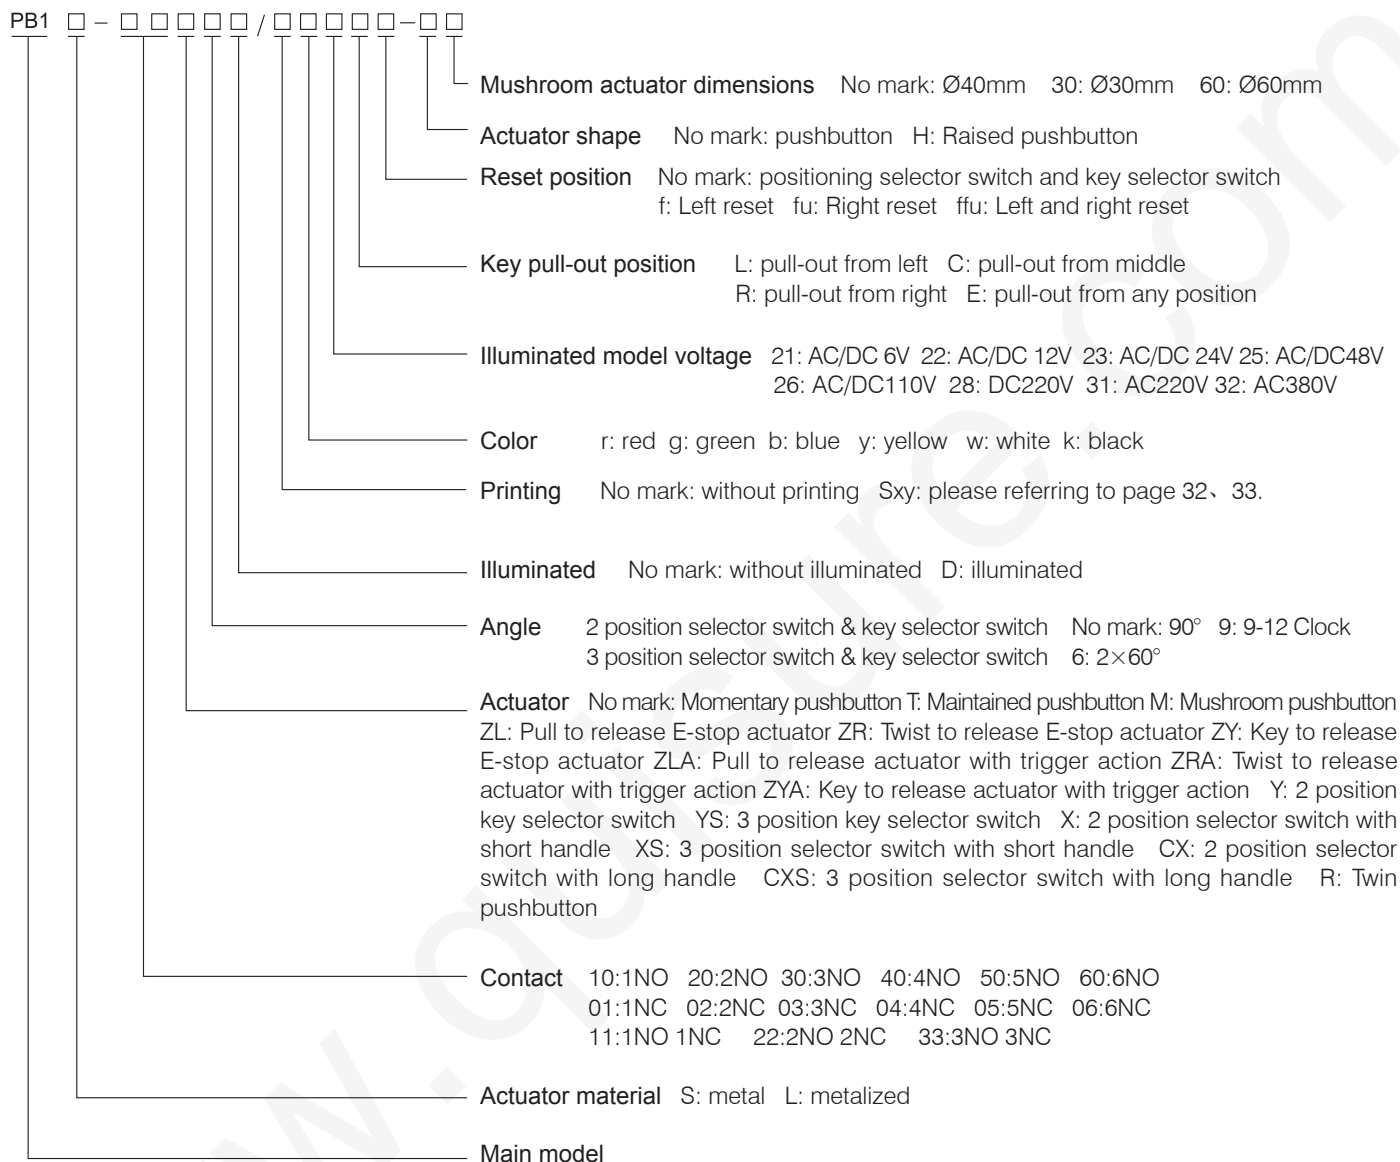
PB1 introduction

- RoHS material.
- Modularized design with easy installation.
- Protection class: IP65.




PB1L Emergency Switch

Model definition




Part model

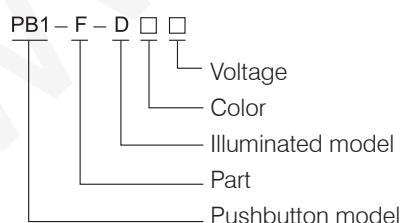
Illuminated model



Actuator

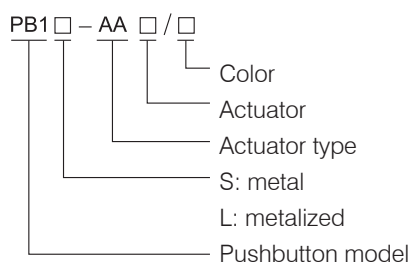

Holder

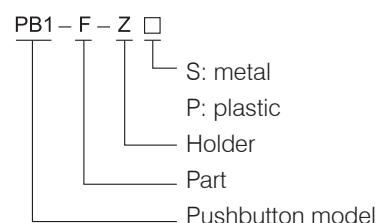





Technical Data

Technical data



Standards:	IEC60947 Part1, IEC60947 Part 5-1, IEC60947 Part 5-5 GB14048.5, GB14048.1 GB14048.14 ISO13850									
Rated Insulation Voltage U_i :	AC 600V, 50Hz illumination module: AC440V, 50Hz; DC250V									
Rated Impulse Withstand Voltage U_{imp} :	AC 1890V 50Hz.1min									
Conventional Thermal Current I_{th} :	10A									
Rated Load:	Load type Rated operation voltage U_e				24V	48V	110V	220V	380V	440V
	AC-12	Rated operation current I_e			10A	-	10A	10A	10A	10A
	DC-12				10A	8A	3.5A	1A	-	-
	AC-15				6A	-	6A	6A	4A	4A
	DC-13				6A	4A	1.2A	0.4A	-	-
Illuminated data:	Voltage number 21 22 23 25 26 28 31 32									
	Voltage(V)AC/DC6VAC/DC12VAC/DC24V C/DC48V AC/DC110VDC220VAC220V AC380V									
	Current (mA) 18 17 16 11 18 5 19 12									
Pollution Class:	3									
Mechanical Endurance:	Pushbutton &Illuminated pushbutton& Mushroom pushbutton: 3×10^6 times Selector switch & Compact pushbutton & Twin pushbutton &Maintained pushbutton: 3×10^5 times Key selector switch & E-stop actuator: 5×10^4 times Contact model: 3×10^6 times									
Operating Frequency:	1200 times/1hour									
Electrical Endurance:	5×10^5 times I_e / AC-15 at 6A/220V/230V Min. load: DC24V 5mA									
Operation Temperature:	Operation -25℃ -70℃ Storage -40℃ -80℃									
Protection Class:	IP65	Key selector switch IP54			Contact model and illuminated model IP20					
Shock Amplitude:	$\leq 15g$ (IEC60068 2-27)									
Impact Amplitude:	$\leq 5g$ 10-500Hz (IEC60068 2-6)									
Contact Resistance:	<50mΩ									
Contact Material:	AgNi10/Cu									

Installation Mounting-hole Dimensions

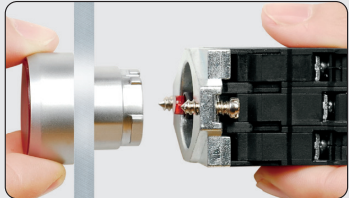How to install?

1. Installing the actuator into the mounting-hole.	
2. Installing the holder.	
3. Tighten the screws on holder.	
4. Dismantle the switching element or the lighting element: for simply demounting the installed element, hold up the buckle of lock-type installation system with a straight screwdriver.	

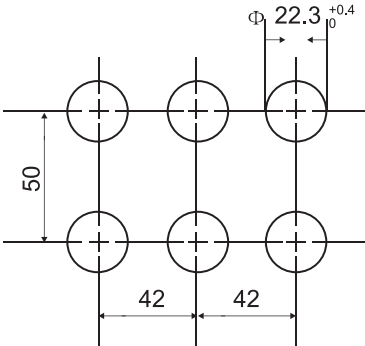Mounting-hole Size




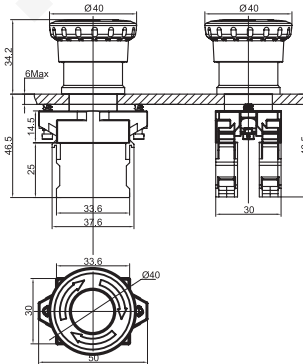

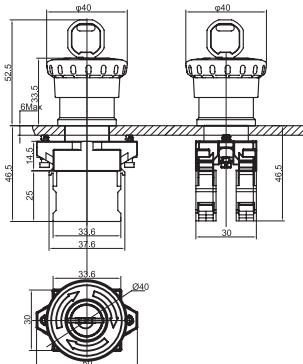
Pushbutton	E-stop pushbutton, Mushroom pushbutton, Select switch with long-handle
	

Notes:

- The tightening torque of wiring screw for switching element is 0.8-1.2Nm.
- The screw tightening torque of metal installation middle seat is no larger than 1Nm, and that of metalized installation middle seat is no larger than 0.8Nm.
- After installing the switching element or the lighting element, check whether the buckle is clipped in completely.

PB1L


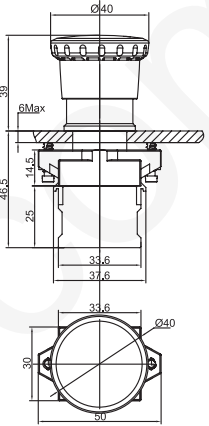

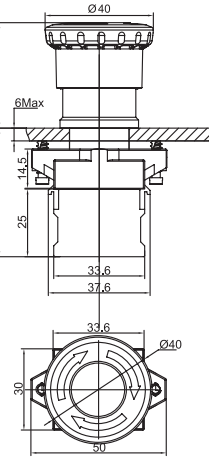

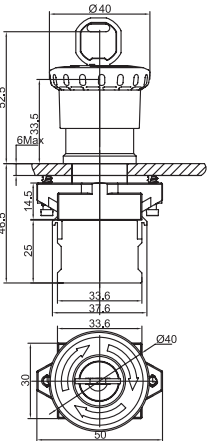
Emergency-stop switch model selection

Name	Type	Status	Model	Color	Dimensions
Pull to release E-stop pushbutton		Latching	PB1L-■ZL/▲	red-r	
Twist to release E-stop pushbutton		Latching	PB1L-■ZR/▲	red-r	
Key to release E-stop pushbutton		Latching	PB1L-■ZY/▲	red-r	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. The pull to release E-stop pushbutton only have Ø40mm series.
The twist to release pushbutton and key to release pushbutton have Ø30mm、Ø40mm series.

Emergency-stop switch with trigger action










Name	Type	Status	Model	Color	Dimensions
Pull to release E-stop pushbutton with trigger action		Latching	PB1L-■ZLA/▲	red-r	
Twist to release E-stop pushbutton with trigger action		Latching	PB1L-■ZRA/▲	red-r	
Key to release E-stop pushbutton with trigger action		Latching	PB1L-■ZYA/▲	red-r	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. The pull to release E-stop pushbutton only have Ø40mm series.
The twist to release pushbutton and key to release pushbutton have Ø30mm、Ø40mm series.







Accessories

Accessories

Name	Type	Model			Description	Function
Mushroom pushbutton		30mm	Momentary	PB1S-AAM/▲-30 PB1L-AAM/▲-30	▲: color r-red g-green b-blue y-yellow w-white k-black	Actuator
		40mm	Momentary	PB1S-AAM/▲ PB1L-AAM/▲		
		60mm	Momentary	PB1S-AAM/▲-60 PB1L-AAM/▲-60		
Illuminated mushroom pushbutton (Momentary)		30mm	PB1S-AAMD/▲-30 PB1L-AAMD/▲-30		▲: color r-red g-green b-blue y-yellow w-white	
		40mm	PB1S-AAMD/▲ PB1L-AAMD/▲			
		60mm	PB1S-AAMD/▲-60 PB1L-AAMD/▲-60			
Pull to release mushroom pushbutton (Latching)		40mm	PB1S-AAML/▲ PB1L-AAML/▲		▲: color r-red g-green b-blue y-yellow w-white k-black	
		60mm	PB1S-AAML/▲-60 PB1L-AAML/▲-60			
Pull to release E-stop pushbutton		40mm	PB1S-AAZL/r PB1L-AAZL/r		red	
Pull to release E-stop pushbutton with trigger action		40mm	PB1S-AAZLA/r PB1L-AAZLA/r		red	
Twist to release E-stop pushbutton		30mm	PB1S-AAZR/r-30 PB1L-AAZR/r-30		red	
		40mm	PB1S-AAZR/r PB1L-AAZR/r			
Twist to release E-stop pushbutton with trigger action		40mm	PB1S-AAZRA/r PB1L-AAZRA/r		red	
Key to release E-stop pushbutton		30mm	PB1S-AAZY/r-30 PB1L-AAZY/r-30		red	
		40mm	PB1S-AAZY/r PB1L-AAZY/r			
Key to release E-stop pushbutton with trigger action		40mm	PB1S-AAZYA/r PB1L-AAZYA/r		red	

Accessories

Accessories

Name	Type	Model	Description	Function
Contact module		PB1-F-C10	1NO	Contact module
		PB1-F-C01	1NC	
Illuminated module		PB1-F-D/▲★	▲ : Color ★ : Rated voltage	Illuminated module
Holder		PB1-F-ZS	S: metal	Holder
		PB1-F-ZP	P: Plastic	
Seal cover		PB1-F-M1	Only PB1S use	Select and use
		PB1-F-M2	Only PB1L use	
Protecting cover		F1	IP65	Select and use
		F2	Metal	Select and use

Accessories

Accessories

Name	Type	Model		Description	Function
Protective cap		F3-1		Plastic	
		F3-2		Plastic	
		F3-3		Plastic	
Installing ring		F7		Φ30mm	Select and use
Label holder		PB1-F-B11-10 书写面积25×10mm PB1-F-B11-18 书写面积25×18mm		Φ22.5mm	
Label panel		PB1-F-B12		Φ22.5mm	
Yellow name plate		F13-60 F13-90	Φ60 Φ90	Φ22.5mm	Used for emergency-stop pushbutton
		F14a-40 F14a-60	Φ40 Φ60		
		F14b-60 F14b-90	Φ60 Φ90		

Accessories

Accessories

Name	Type	Model		Description	Function
E- stop pushbutton protective cover		PB1-F-PC-a60		Φ22.5mm	Used for emergency-stop pushbutton
		PB1-F-PC-b60 PB1-F-PC-b90		Φ22.5mm	
Indicator light installing ring		F15-25 F15-30	Φ25 Φ30	Special for indicator light	Select and use
Indicator light insert label		F-18	POM	Printing	
Blanking plugs		F19	Φ22	Injection molding	