


PB1J Push Button 22mm Siemens APT



Model definition

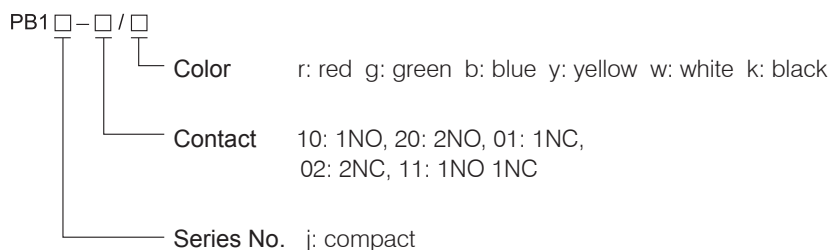

Technical Data

Standards:	IEC60947 Part1, IEC60947 Part 5-1, GB14048.5, GB14048.1
Rated Insulation Voltage Ui:	AC 300V, 50Hz
Rated Impulse Withstand Voltage Uimp:	AC 1500V 50Hz.1min
Conventional Thermal Current Ith:	5A
Rated load:	AC-15 230V 2A DC-13 24V 1A
Pollution class:	III
Mechanical endurance:	3X10 ⁵ times
Electrical endurance:	1X10 ⁵ times
Operation temperature:	Operation -25 C -70 C Storage -40 C -80 C
Protection class:	IP65
Shock amplitude:	≤15g (IEC60068 2-27)
Impact amplitude:	≤5g (IEC60068 2-6)
Contact resistance:	< 50mΩ
Contact material:	AgNi10/Cu

Model Selection

Name	Type	Status	Model	Color	Dimensions
Pushbutton		Momentary	PB1J-■/▲	red-r green-g yellow-y blue-b white-w	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.