

LA39-G Selector Switch 16mm Siemens APT


Performance Features

LA39-G series Pushbuttons are the latest products independently developed by us and have independent intellectual properties. This series of products have integrated the advantages of the like products and also made up the disadvantages of other products. Its delicate design, complete specifications, convenient installation, good visual appearance and reliable operation are the biggest advantages of this series of products.



Structural Features

LA39-G series Pushbuttons have applied the internationally popular modularized combination structure and mainly consist of two parts – operation actuators and contact modules. The actuator is designed with the smooth lines, ultrathin sizes, and various visual types. The protection class of IP 65 also has greatly enhanced the delicacy of the control panel.

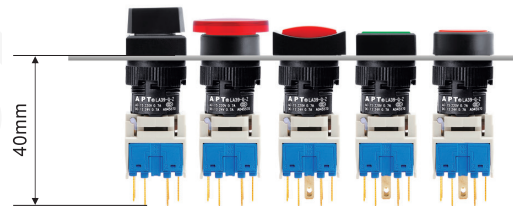

Contact Performance


With our unique technical expertise, the contact module of LA39G series Pushbuttons has been designed into two-breakpoint quick-action structure, which has greatly improved the contact reliability and electrical breaking capacity. The contact is gold plated so that it can work reliably under the low-voltage and micro-current conditions. One module can provide a pair of independent NO and NC contacts. One Pushbutton can be installed with a maximum of three contact modules (3 pairs of NOcontacts + 3 pairs of NCcontacts).




LA39-G Selector Switch 16mm Siemens APT

Model Description


Pushbuttons

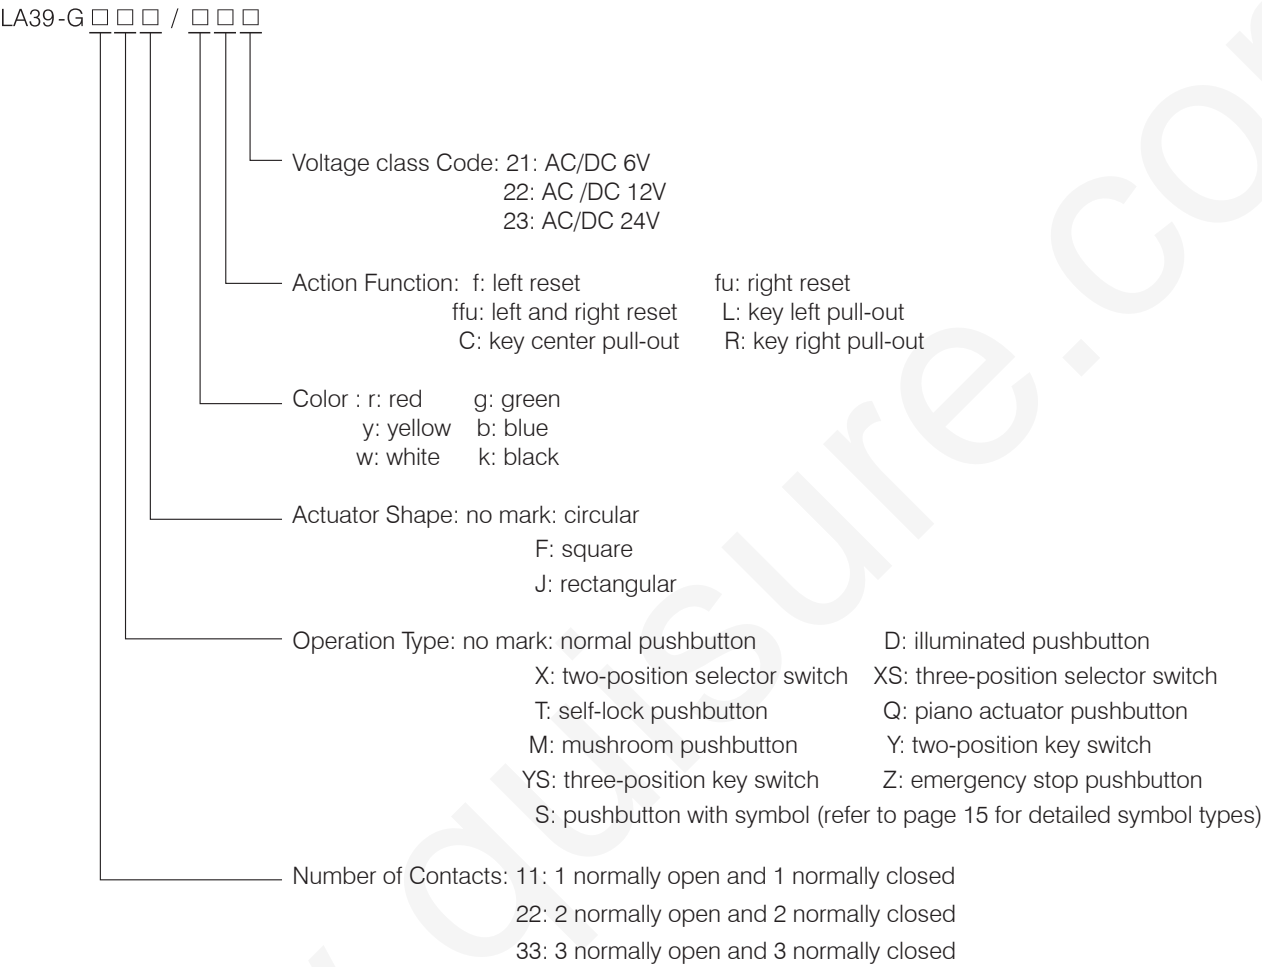

Indicator

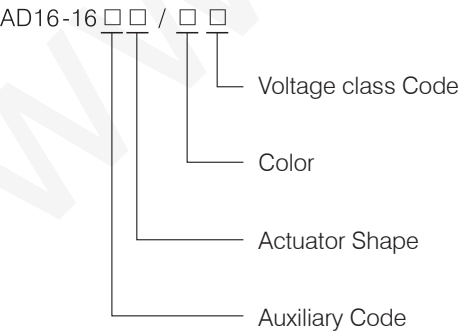

Buzzer

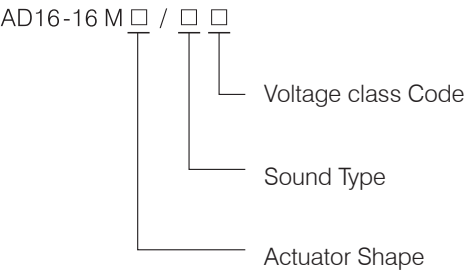

LA39-G Selector Switch 16mm Siemens APT

Basic Technical Parameters

Work Temperature	-25℃～+55℃		
Work Humidity	45～85%RH		
Contact Resistance	≤100m Ω		
Rated impulse Withstand Voltage Uimp	2000V AC		
Mechanical endurance	For normal pushbuttons 10×10 ⁵ times For selector switch 10×10 ⁴ times For emergency pushbutton 5×10 ⁴ times		
Electrical endurance	AC-15	100,000 times (1,200 times/hour)	
	DC-13	50,000 times (1,200 times/hour)	
Protection Class	IP65	Those with “TH” mark can work normally under the humid tropic environment.	
Action Travel	1.5～2.5mm		


Maximum Contact Capacity

Rated Insulation Voltage Ui		250V		
Conventional Thermal Current Ith		5A		
Application Category	Rated Work Voltage Ue	24V	110V	220V
AC-15	Rated Work Current Ie	2A	1A	0.5A
DC-13		0.7A	0.2A	0.1A

Contact Types and Wiring Diagrams


1 NO and 1
normally closed

Wiring
diagram

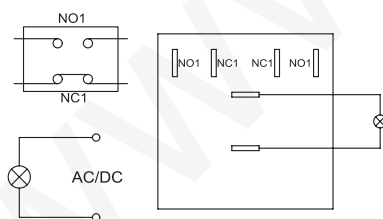


2 NO and 2
normally closed

Wiring
diagram



3 NO and 3
normally closed


Wiring
diagram

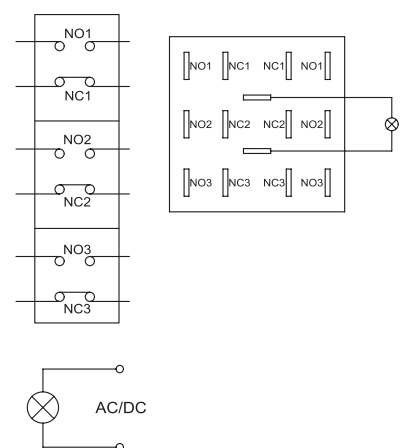

LA39-G Selector Switch 16mm Siemens APT


Installation Method

The installation sequence is as follows: first pass the operation part through the panel hole and fix it after fastening the nuts. Then press the lock catch of the switch seat with the lock catch foot of the operation part together. Disassemble the switch seat only by pressing the lock catch of the switch seat towards the inner side.

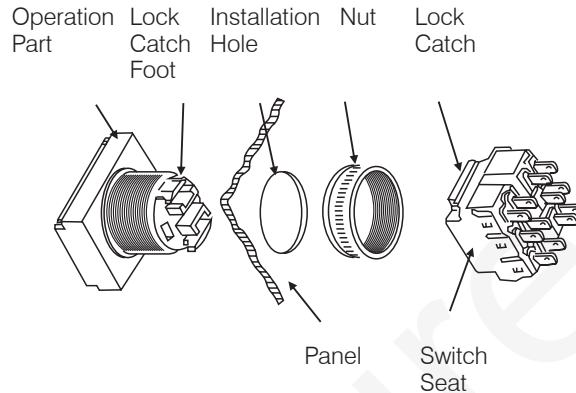


Installation Hole Size


Round/Square Actuator Hole




Rectangular Actuator Hole




Mushroom Pushbutton and Emergency Stop Pushbutton Actuator Hole



Hole for Actuator with Installation Guard Cover F-I



Hole for Actuator with Installation Guard Cover F-II



Precautions






- There are two wiring methods, i.e. welding and plug-pull type. If plug-pull type wiring is adopted, it is suggested that the internationally common used plug bush ($2.8 \times 0.5\text{mm}$) shall be used and the jacket shall be installed.
- If the welding is required for the wiring:
 - Hand welding 25W, within 3 seconds.
 - Auto welding 240°C , within 3 seconds.

No external force shall be applied within 1 minute after being welded and then the jacket shall be installed. Do not use any solvent for welding in order to prevent it from entering the inside of the switch and damaging the products.

- The Pushbuttons shall be hand operated. It is prohibited to use any other tool for operation!


LA39-G Selector Switch 16mm Siemens APT

Two-position Selector Switch

Name	Operation Actuator	Contact	Model		Color
			Two-position positioning 	Two-position right resetting 	
Two-position Selector Switch (Round)		11	LA39-G11X/□	LA39-G11X/□fu	red-r green-g yellow-y blue-b white-w
		22	LA39-G22X/□	LA39-G22X/□fu	
		33	LA39-G33X/□	LA39-G33X/□fu	
Two-position Selector Switch (Square)		11	LA39-G11XF/□	LA39-G11XF/□fu	
		22	LA39-G22XF/□	LA39-G22XF/□fu	
		33	LA39-G33XF/□	LA39-G33XF/□fu	
Two-position Selector Switch (Rectangular)		11	LA39-G11XJ/□	LA39-G11XJ/□fu	
		22	LA39-G22XJ/□	LA39-G22XJ/□fu	
		33	LA39-G33XJ/□	LA39-G33XJ/□fu	

Description: “□” in the column of model is indicated with color.


Appearance dimension

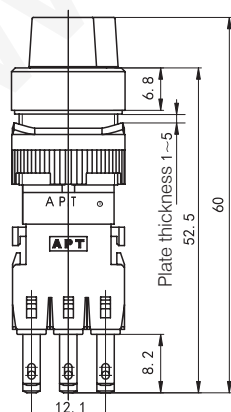


Round actuator



Square actuator






Rectangular




LA39-G Selector Switch 16mm Siemens APT

Three-position Selector switch

Name	Operation Actuator	Contact	Model				Color
			Three-position positioning <div> <div>L</div> <div>C</div> <div>R</div> <div>45°</div> <div>45°</div> </div>	Three-position left resetting <div> <div>L</div> <div>C</div> <div>R</div> <div>45°</div> <div>45°</div> </div>	Three-position right resetting <div> <div>L</div> <div>C</div> <div>R</div> <div>45°</div> <div>45°</div> </div>	Three-position left and right resetting <div> <div>L</div> <div>C</div> <div>R</div> <div>45°</div> <div>45°</div> </div>	
Three-position Selector Switch (Round)		22	LA39-G22XS/□	LA39-G22XS/□f	LA39-G22XS/□fu	LA39-G22XS/□ffu	red-r
		33	LA39-G33XS/□	LA39-G33XS/□f	LA39-G33XS/□fu	LA39-G33XS/□ffu	
Three-position Selector Switch (Round)		22	LA39-G22XSF/□	LA39-G22XSF/□f	LA39-G22XSF/□fu	LA39-G22XSF/□ffu	green-g
		33	LA39-G33XSF/□	LA39-G33XSF/□f	LA39-G33XSF/□fu	LA39-G33XSF/□ffu	yellow-y
Three-position Selector Switch (Rectangular)		22	LA39-G22XSJ/□	LA39-G22XSJ/□f	LA39-G22XSJ/□fu	LA39-G22XSJ/□ffu	blue-b
		33	LA39-G33XSJ/□	LA39-G33XSJ/□f	LA39-G33XSJ/□fu	LA39-G33XSJ/□ffu	white-w






Description: “ □ ” in the column of model is indicated with color.

Appearance dimension

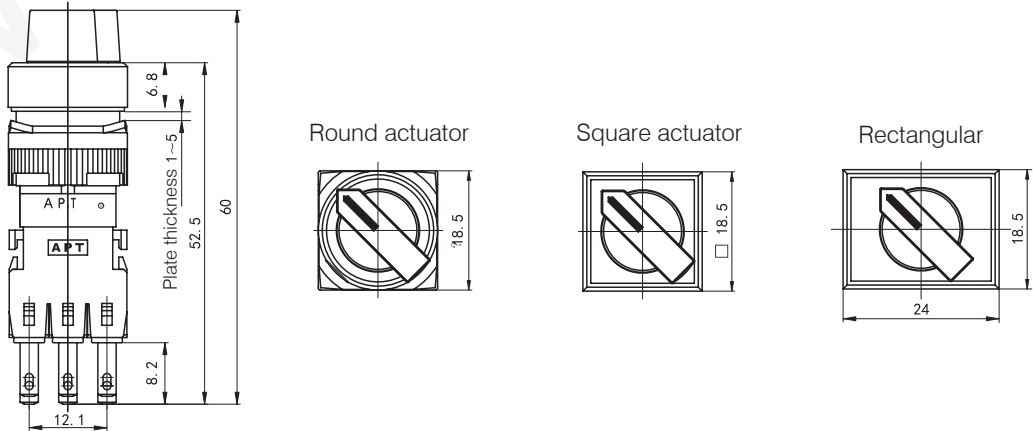

LA39-G Selector Switch 16mm Siemens APT

Accessories

Name	Type	Model	Description	Function	Size
Clamping Ring		F-X		Prevent the pushbutton rotation	
Contact Module		F-XI		For free combination of the contacts	
Simulation Device		F-XII		It is used to fill the positions where the contact modules are not installed	